
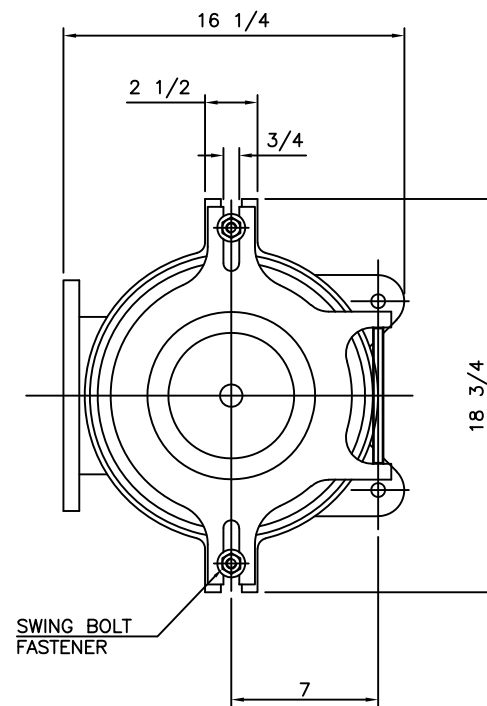


RELEASE EYEBOLTS  
SECURING COVER  
AND SWING CUTTING  
MECHANISM CLEAR  
OF CASING FOR  
INSPECTION AND  
MAINTENANCE


# MODEL 7A-6 **HEAVY DUTY**

FREE DISCHARGE

SERIAL NO.: -

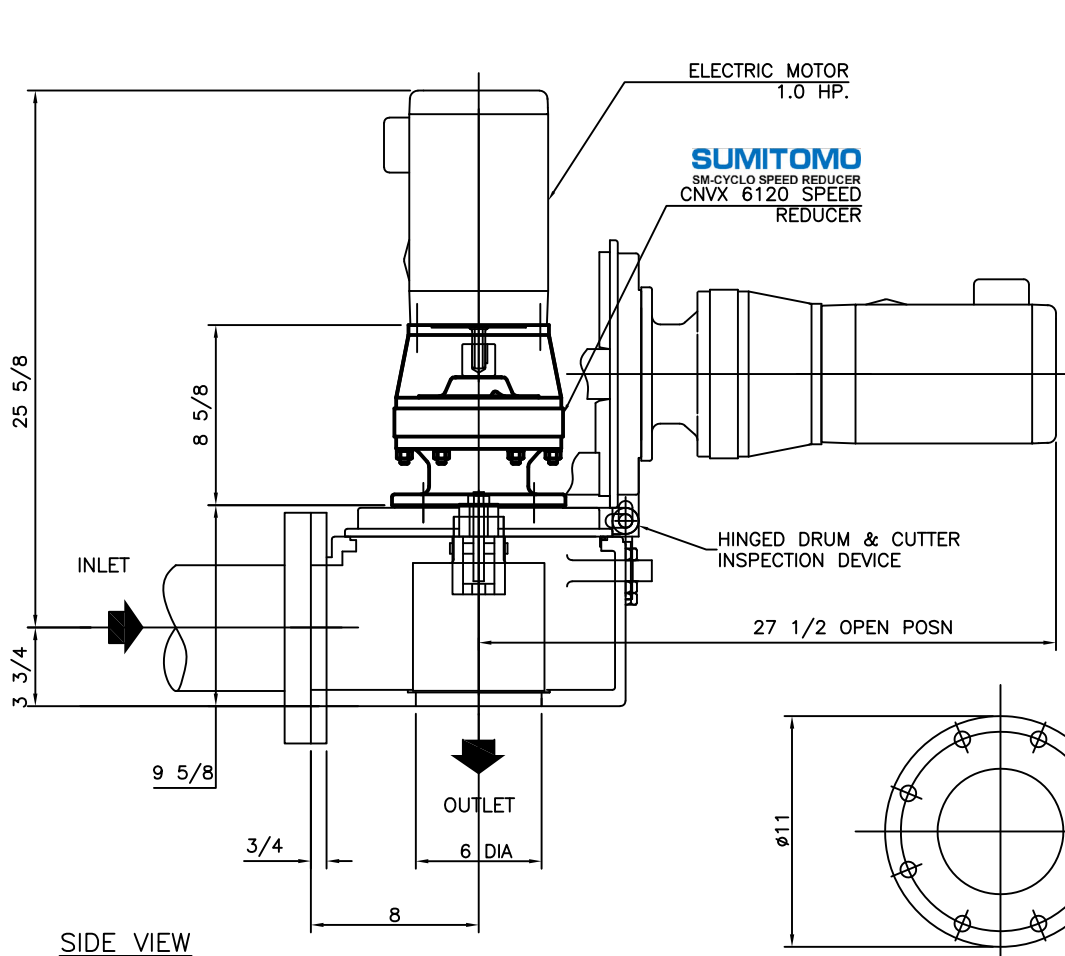


TOP VIEW

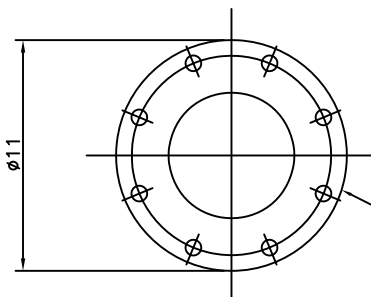

INLET FLANGE  
6" 125 lb, 11" O.D., DRILLED  
& TAPPED HOLES FOR 3/4"-10 UNC BOLTS,  
8 No EQUI-SPACED ON 9.5" B.C.D.

INLET FLANGE DETAIL

### MATERIALS OF CONSTRUCTION & GENERAL ENGINEERING DATA



**G.E.T. INDUSTRIES INC.**

get@grindhog.com  
www.grindhog.com  
1 (877) 213-7418

HOUSING:	GREY IRON	CAPACITY:	315 GPM (US) / 19.9 L/s	INLET AREA:	34 SQ. IN. / 219.4 cm sq.
DRUM (SCREEN):	DUCTILE IRON (ASTM 536 GRADE 60-45-18)	DRUM SPEED:	50 RPM	OUTLET AREA:	20 SQ. IN. / 129 cm sq.
SHEAR BARS:	AISI-A2 HIGH ALLOY TOOL STEEL	ROTATION:	C / CLOCKWISE	DRUM DIAMETER:	6.5 IN. / 16.5 cm
CUTTING BARS:	AISI-01 TOOL STEEL REVERSIBLE	SLOT WIDTH:	.470 IN / 12 mm	WEIGHT:	225 LBS / 102 kg
HARDWARE & FASTENERS:	304 STAINLESS STEEL	NO. OF SLOTS:	20		
MOTOR MANUFACTURER:	-	POWER:	/ 3 / 60	RPM:	1750
REDUCER:	SM - CYCLO	MODEL:	V6120		
STYLE:	TEFC (IP55)	HP:	1.0	KW:	0.746
FRAME:	56C	FLANGE:	'C'	RATIO:	35:1
				RATING:	4.27 HP

TOLERANCES	DIMENSIONAL DETAIL	SCALE	
DECIMAL		NTS	
FRACTIONAL		DRAWN BY G.P.	
ANGULAR		APPROVED BY W.D.M.	
DATE	FILE NO.	DWG. NO.	REVISION
MAR. 2014	-	6 0052, 90059, 9 0099, 9 0201	